



# MEMORANDUM

## Town of Nags Head

### Planning & Development Department

---

To: Planning Board  
From: Kelly Wyatt, Deputy Planning Director  
Michael Zehner, Director of Planning and Development  
Date: ~~March 13, 2020~~ June 12, 2020  
Subject: Discussion of Large Occupancy Homes

---

Following discussion with the Planning Board at their January 2020 meeting, and guidance from the Board of Commissioners at their February 2020 meeting, Planning Staff has initiated review of the concerns expressed with large occupancy homes. Both the Planning Board and the Board of Commissioners recommended staff review the Town's standards in relation to the following amendments which have since been adopted by the Town of Kill Devil Hills Board of Commissioners.

Town of Kill Devil Hills Planning staff was given direction to draft amendments to address safety issues and options to incentivize fire suppression systems for large single-family dwelling units. At their May 27<sup>th</sup> meeting, Kill Devil Hills staff presented and the Board of Commissioners unanimously adopted an amendment which would increase side yard setbacks for single-family/duplex dwellings greater than 6,000 square feet in area, by two feet in order to provide adjacent properties and the overall community a greater safeguard from the spread of fires. Such dwellings could be exempt from this requirement, providing a fire suppression system is reviewed, approved, installed and inspected annually by the Fire Marshal. It is noted that this installation of a fire suppression system provides safeguards for the persons occupying the dwelling in addition to the adjacent properties, and overall community.

Side yard setbacks in the low- and high-density residential zoning districts within the Town of Kill Devil Hills are determined by the overall lot area. These requirements are outlined below:

Lots 5,000 sf or less = 6 ft. side yard setback  
Lots greater than 5,000 sf but less than 7,500 sf = 8 ft. side yard setback  
Lots greater than 7,500 square feet = 10 ft. side yard setback

Side yard setbacks in the Ocean Impact Residential zoning district within the Town of Kill Devil Hills is determined by lot width. These requirements are outlined below:

Lots less than 75 ft. in width = 10 ft. side yard setback  
Lots greater than 75 ft in width = 12 ft side yard setback

It is important to note that the increased 2-foot setback applies to homes that are greater than 6,000 square feet in area. Within the Town of Nags Head no home can exceed 3,500 square feet of habitable space if on a lot less than 16,000 square feet in area. On lots greater than 16,000 square feet in area, a dwelling cannot exceed 5,000 square feet. Note, Nags Head has more stringent regulations on total allowable house

size than the Town of Kill Devil Hills. At this time, under no circumstance would a 6,000 square foot home be constructed within the Town of Nags Head. Regardless, the minimum allowable side yard setback in the Town of Nags Head would either be 8', 10', 12' or 15' depending on the zoning district.

Additionally, the Town of Kill Devil Hills Commissioners adopted an ordinance that amends off-street parking and loading requirements as it pertains to emergency vehicle access. This amendment applies only to dwellings with eleven (11) or more required parking spaces, and incentivizes these dwellings to provide a 10-foot wide marked and unobstructed drive aisle up to within 20 feet of the front entrance of the dwelling by reducing the side yard setback for the driveway from 7 feet to 5 feet.

There are several items to note with regard to the off-street parking and loading requirements within the Town of Nags Head (Article 10, Part II attached).

- With the habitable area of a dwelling capped at 5,000 square feet, while the Town cannot regulate the number of bedrooms, it does occur that between 8 and 9 bedrooms are approved by the Dare County Health Department in the large residential dwellings. With a parking standard for single-family and duplex dwellings equal to the number of bedrooms minus 2, it is very unlikely there will be a parking scenario within the Town necessitating eleven (11) required parking spaces.
- Residential driveways are required to be minimum of 12-feet in width within the Town of Nags Head. The minimum 12-foot width must extend to the front plane of the house and no stacking of vehicles is permitted in this 12-foot drive aisle. Thus, only one 10 x 18 parking space can be provided in the main drive aisle.

In review of the Town of Nags Head's current requirements in contrast to the recently adopted amendments by the Town of Kill Devil Hills to address Large Occupancy Homes, it appears that Nags Head's requirements are already significantly more restrictive with respect to the size of homes and setbacks, and address emergency vehicle access to the front plane of the dwelling as presently written. At this time, Staff would not recommend any further action, and if the Board agrees, would report the same to the Board of Commissioners. If the Board believes that further consideration is warranted, Staff would recommend that consideration be given to programming and prioritizing this initiative within the Department's Work Plan.

Staff will be available to continue discussion and answer any questions.

## PART II. OFF-STREET PARKING AND LOADING REQUIREMENTS

### SECTION 10.11 PURPOSE AND INTENT.

The purpose of this section is to proactively protect, maintain and enhance the public health, safety, environment, and general welfare by establishing requirements to provide the appropriate amount and location of off-street parking and off-street loading which will:

- 10.11.1.** Maintain and increase the level of service of the Town's streets and ability of the Town's street system to safely move traffic;
- 10.11.2.** Facilitate safe access to and from streets;
- 10.11.3.** Avoid conflicts between motorized and non-motorized vehicles and pedestrians;
- 10.11.4.** Maintain and protect the visual attractiveness and community character of the Town;
- 10.11.5.** Promote low-impact development which emphasizes stormwater management, the use of vegetative buffering and landscapes, and the preservation of open space;
- 10.11.6.** Maximize the re-use of existing parking areas; and
- 10.11.7.** Promote re-use of existing commercial sites by allowing for redevelopment to use existing parking configurations in appropriate circumstances.

### SECTION 10.12 PARKING LOT REQUIREMENTS FOR SINGLE-FAMILY AND TWO-FAMILY (DUPLEX) DWELLING UNITS.

Permanent off-street parking spaces shall be provided in accordance with the following requirements prior to the completion of construction of any building or structure, or at the time any principal building or structure is enlarged or increased in capacity by adding dwelling units or before conversion from one zoning use or occupancy to another:

#### **10.12.1. Reserved for the Use Intended.**

Required off-street parking spaces and loading spaces are permanent areas and shall not be used for any other above ground purpose.

#### **10.12.2. Safety on Busy Streets.**

A turnaround area having sufficient maneuvering space, not less than ten (10) feet x ten (10) feet, shall be provided between the designated parking spaces and a minimum of five (5) feet from the right-of-way, so that no vehicle will be required to back into the public right-of-way. Homes which do not front on NC 12, US 158, SR 1243, and oceanfront homes that have lost access due to erosion, shall be exempt from this requirement (see also Section 8.7, Reduction in Development Standards for Erosion Threatened Structures).

# ARTICLE 10. PERFORMANCE STANDARDS

## 10.12.3. Surface Materials Appropriate for Use.

**10.12.3.1.** Required parking spaces shall be graded and paved with asphalt, concrete, gravel, or other surface material designed to support the intended vehicular loading and in accordance with manufacturer's recommended specifications or other acceptable methods for design of pavement structures. This provision shall not apply in situations where a CAMA permit cannot be obtained for these surface materials.

**10.12.3.2.** As an alternative to the approved parking space surfaces stated above, an applicant may improve up to twenty (20) percent of the required spaces with reinforced turf pavement. The use of reinforced turf pavements shall be designed to support the intended vehicular loading and in accordance with manufacturer's recommended specifications or other acceptable methods for design of pavement structures. Turf reinforced pavements shall be considered an innovative permeable pavement surface and may be reviewed by the Town Engineer and the fire official having jurisdiction for suitability and shall count as lot coverage in the same manner as other similar permeable pavement surfaces. Turf reinforced pavements shall be installed and maintained in accordance with manufacturers recommended specifications and NCDEQ BMP manual, latest edition. If the turf reinforced pavement is not being maintained in accordance with the provision above, the owner may be required to re-surface the parking in accordance with subsection 10.12.3.1.

## 10.12.4. Number of Parking Spaces Required.

Parking spaces shall be based on the following formula:  $N-2$ , with N representing the number of bedrooms authorized by the septic improvement permit issued by the Dare County Health Department or the appropriate permitting agency. The minimum number of parking spaces shall be two (2).

## 10.12.5. Additional Bedrooms.

Prior to issuance of a certificate of completion for the construction of any additional bedroom or bedrooms to an existing single-family or two-family dwelling, all required parking spaces shall be installed.

## 10.12.6. Dimensional Requirements.

All residential parking area dimensions shall, at a minimum, conform to the dimensional requirements shown in the table below:

Residential Dimension	Single Side Parking	Double Side Parking
Aisle width (W)	12.0	12.0
Curb-to-curb width (X)	30.0	48.0
Curb-to-aisle width (Y)	18.0	18.0
Minimum stall width (Z)	10.0	10.0
Parallel parking	10' width by 20' length	
*Figures A and B illustrate parking and drive aisle dimensional requirements, setbacks, and acceptable stacking configurations.		

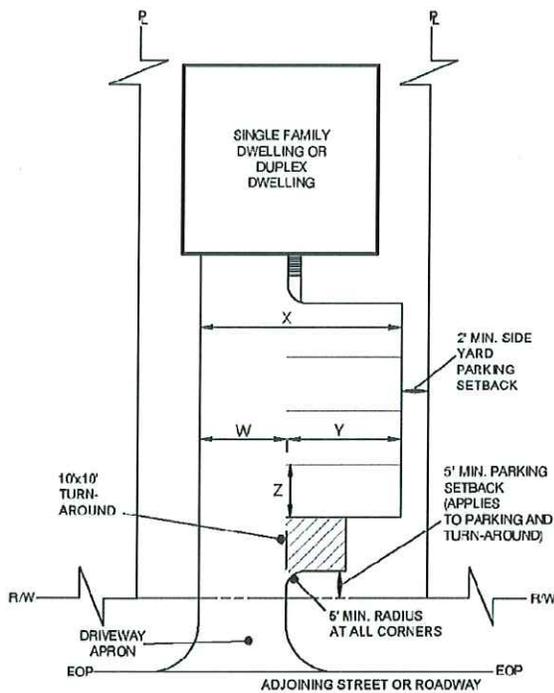


Figure A

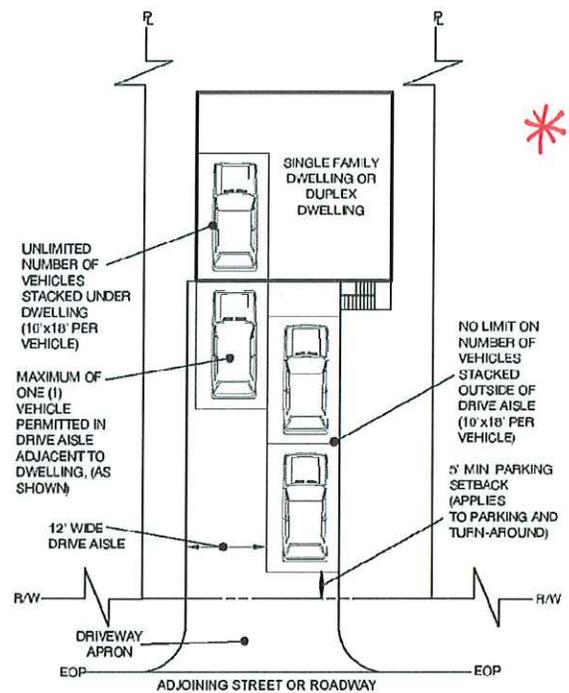


Figure B

**10.12.7. Drive Aisle Width and Stacking Requirements.**

Drive aisles shall be a minimum twelve (12) feet in width and shall be improved up to the front plane of the dwelling. One (1) parking space may be located at the end of the drive aisle closest to the dwelling. Other stacking of vehicles in the drive aisle is prohibited. Stacking of vehicles under the dwelling or outside of the required 12-foot driveway is unlimited. All parking areas shall be located to allow clear use of a designated turn-around area.

**10.12.8. Setbacks for Parking and Drive Aisles.**

**10.12.8.1.** All parking spaces, turn-around areas, and drive aisles shall be located no closer than two feet from any adjacent property line except where drive aisles and driveways are shared between adjacent properties.

**10.12.8.2.** Parking spaces, turn-around areas, and drive aisles shall be set back from the adjacent right-of-way a minimum of five (5) feet, not including the driveway and driveway apron which connects the parking areas and drive aisle to the roadway pavement.

**SECTION 10.13 PARKING REQUIREMENTS FOR ALL USES OTHER THAN SINGLE-FAMILY AND TWO-FAMILY (DUPLEX) DWELLING UNITS.**

**10.13.1.** Permanent off-street parking spaces shall be provided in accordance with the minimum parking requirements contained in this section prior to the completion of construction of any building or structure, or at the time any principal building or structure is enlarged or increased in capacity by adding dwelling units, hotel units, seats or gross floor area, or before conversion from one zoning use or occupancy to another.

